

ETS-T40fit





ETS-T40F-RF

ETS-T40fit

CPU cooler

- 200W TDP Supported
- 100% RAM Compatibility*
- 14cm Twister Bearing fan
- Intel® Skylake (LGA 1151) support



ETS-T40F-RF


Features

- Compact side flow air cooler for 100% RAM compatibility
- Outstanding cooling performance : Thermal resistance 0.1°C/W
 - VGF (Vortex Generator Flow), to increase air convection in-between the fins
 - VEF (Vacuum Effect Flow), to optimize airflow inside the cooler
 - HDT (Heat-pipe Direct Touch), to improve thermal conductivity
- 4 x Ø6mm high performance heat pipes to improve heat conductivity
- 14cm winglet-blade PWM fan provides voluminous airflow and silent operation
- Dual fan installation option
- High thermal conductivity grease to ensure the best thermal conduction between CPU and the heat sink
- Easy and solid Installation :
 - All-in-one back-plate design offers universal AMD & Intel desktop CPU compatibility
 - Durable metal mounting plate


Close-up for features



Patented VGF/VEF design



HDT design




100% RAM compatibility*


*On designated CPU socket

Winglet design

The aerodynamic winglet-blade structure minimizes airflow resistance to increase 10% cooling efficiency.




Winglet design
Less drag & noise






Conventional design

Twister Bearing technology



- MTBF \geq 160,000 hrs
- Low noise profile
- Detachable fan blades

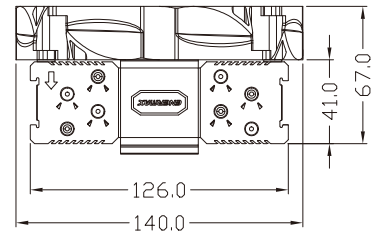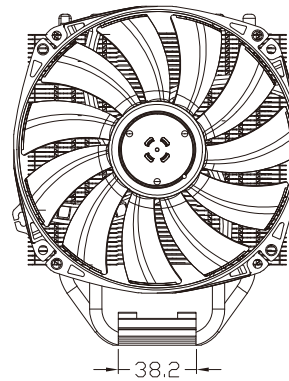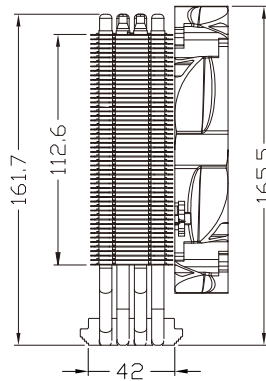

unit : mm

Dimension

Specifications

Model		ETS-T40F-RF
Compatible Socket	Intel® LGA775/1150/1151/1155/1156/1366/2011/2011-3 AMD® AM2/AM2+/AM3/AM3+/FM1/FM2/FM2+	
Heat Sink Dimension (mm)	126(L) x 40(W) x 161.7(H)	
Weight	460g	
Heat Pipe	4 x Ø6 mm	
Material	Copper Heat Pipes / Aluminum Fins	
Thermal Grease	Dow Corning® TC5121	
Fan	Fan Dimension (mm)	140 x 140 x 26 mm
	Speed	500 ~ 1200 RPM
	Air Flow	24.83 ~ 65.56 CFM 42.2 ~ 111.4 m³/h
	Air Pressure	0.24 ~ 1.55 mmH ₂ O
	Rated Voltage	12V
	Bearing Type	Twister Bearing
	MTBF	160,000 hours
	Noise	10 ~ 19 dBA
	Connector	4 pin PWM connector